


► Series AEB.E-IE

Progressing Cavity Pump in block design up to PN 16

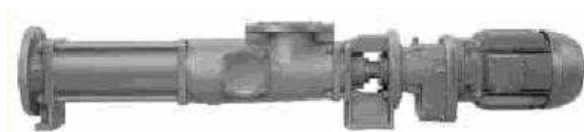

► Pumped Liquid

Low to highly viscous liquids, pasty, neutral or aggressive, pure or abrasive, gaseous or tending to froth, also with fibrous and solids content

► Main Fields Of Application

Sewage and environmental engineering, chemical and petrochemical industries, food and beverages industry, paper and pulp industry, soap and fats industry, dye and paint industry, plastic and ceramics industry

► Performance Data

Capacity	Q	up to	2900	l/min
Discharge Pressure	pd	up to	16	bar
Differential Pressure	pdiff	up to	6	bar
Viscosity	v	up to	300000	mm ² /s
Fluid temperature	t	up to	100	°C
No. Stages	-	up to	2	-

► Construction features

Block design (Motor attached to pump via flange or lantern)
 Pedestal mounting
 Dry installation
 Horizontal installation
 Pump drive directly coupled or by gear or belt transmission
 Self - priming
 Reversible pumping

Document free of charge by phone +49 7732 86-382 fax +49 7732 86-99382

ALLWEILER GmbH
 PO Box 1140
 D-78315 Radolfzell Germany
 Phone.: +49 (0)7732 86-0
 Fax: +49 (0)7732 86-436
 E-mail: service@allweiler.de
 Internet: <http://www.allweiler.com>