

Temposonics®

Magnetostrictive Linear Position Sensors

DATA SHEET

R-Series Powerlink


- Suitable for hard real-time requirements
- Multi-position measurement
- LEDs for sensor diagnostics



The Measurable Difference

MEASURING TECHNOLOGY

For position measurement, the absolute, linear Temposonics® position sensors make use of the properties offered by the specially designed magnetostrictive waveguide. Inside the sensor a torsional strain pulse is induced in the waveguide by momentary interaction of two magnetic fields. The interaction between these two magnetic fields produces a strain pulse, which is detected by the electronics at the head of the sensor. One field is produced by a moving position magnet, which travels along the sensor rod with the waveguide inside. The other field is generated by a current pulse applied to the waveguide. The position of the moving magnet is determined precisely by measuring the time elapsed between the application of the current pulse and the arrival of the strain pulse at the sensor head. The result is a reliable position measurement with high accuracy and repeatability.

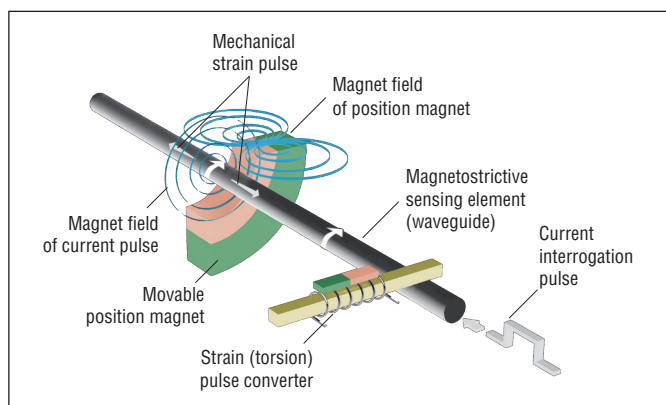

Ethernet Powerlink V2 Interface

Temposonics® position sensors fulfil the requirements of the Ethernet Powerlink Standardization Group (ESPG). Ethernet Powerlink V2 is an open protocol based on the Ethernet-standard according to IEEE 802.3. It is an extension to the Ethernet protocol which allows real-time data communication. Within the Ethernet Powerlink protocol a CANopen based communication protocol for user data is specified. Powerlink is the only Ethernet protocol that meets hard real-time requirements with a software-only concept. No special Powerlink hardware is needed.

Sensor interface :

- Absolute position information
- Velocity
- Status

TECHNICAL DATA

Input	
Measured value	Position, velocity / Option: Multi-magnet measurement (max. 4 positions simultaneous)
Stroke length	Profile: 25...5000 mm / Rod: 25...7600 mm
Output	
Interface	Ethernet Powerlink Standardization Group (ESPG)
Data protocol	Powerlink V2 according to IEEE 802.3
Accuracy	
Resolution - Displacement	up to 1 µm
Update time	1.0 ms up 2400 mm / 2.0 ms up 4800 mm / 4.0 ms up 7600 mm stroke length
Linearity ¹	< ±0.01 % F.S. (Minimum ±40 µm)
Repeatability	< ±0.001 % F.S. (Minimum ±2.5 µm)
Temperature coefficient	< 15 ppm/°C
Hysteresis	< 4 µm
Operating conditions	
Magnet movement velocity	any
Operating temperature	0...+70 °C
Dew point, humidity	90 % rel. humidity, no condensation
Ingress protection ²	Profile: IP65 / Rod: IP67
Shock test	100 g (single shock), IEC-Standard 6008-2-27
Vibration test	15 g / 10...2000 Hz, IEC-Standard 6008-2-6 (resonance frequencies excluded)
EMC test	Electromagnetic emission EN 61000-6-4 (for use in industrial environment) Electromagnetic susceptibility EN 61000-6-2 The sensor meets the requirements of the EC directives and is marked with CE
Design/Material	
Diagnostic display	LEDs beside connector
Profile model:	
Sensor electronics housing	aluminum
Sensor profile	aluminum
Rod model:	
Sensor electronics housing	aluminum
Rod with flange	stainless steel 1.4301 / AISI 304
Installation	
Mounting position	any
Profile	moveable mounting clamps or T-slot nuts M5 in base channel
Rod	threaded flange M18×1.5 or ¾"-16 UNF-3A, Hex nut M18
Electrical connection	
Connection type	4 pin connector M12-DF, 4 pin connector M8
Operating voltage	24 VDC (–15 / +20 %); connection to an approved power supply with energy limitation (IEC 61010-1) respectively class 2 according to National Electric Code (USA) / Canadian Electric Code
Polarity protection	up to –30 VDC
Overvoltage protection	up to 36 VDC
Current drain	110 mA typical
Ripple (power supply)	< 0.28 Vpp
Dielectric strength	500 VDC (DC ground to machine ground)


¹/with magnet # 252 182.

²/The IP rating is not part of the UL approval

PROFILE DESIGN

Temposonics® RP offers modular construction, flexible mounting configurations and easy installation. Position measurement is non-contact via two versions of permanent magnets.


- A sliding magnet running in profile housing rails. Connection with the moving machine part is via a ball jointed arm to taking up axial forces.
- A floating magnet, mounted directly on the moving machine part, travels over the profile at a low distance. Its air-gap allows the correction of small misalignments at installation.

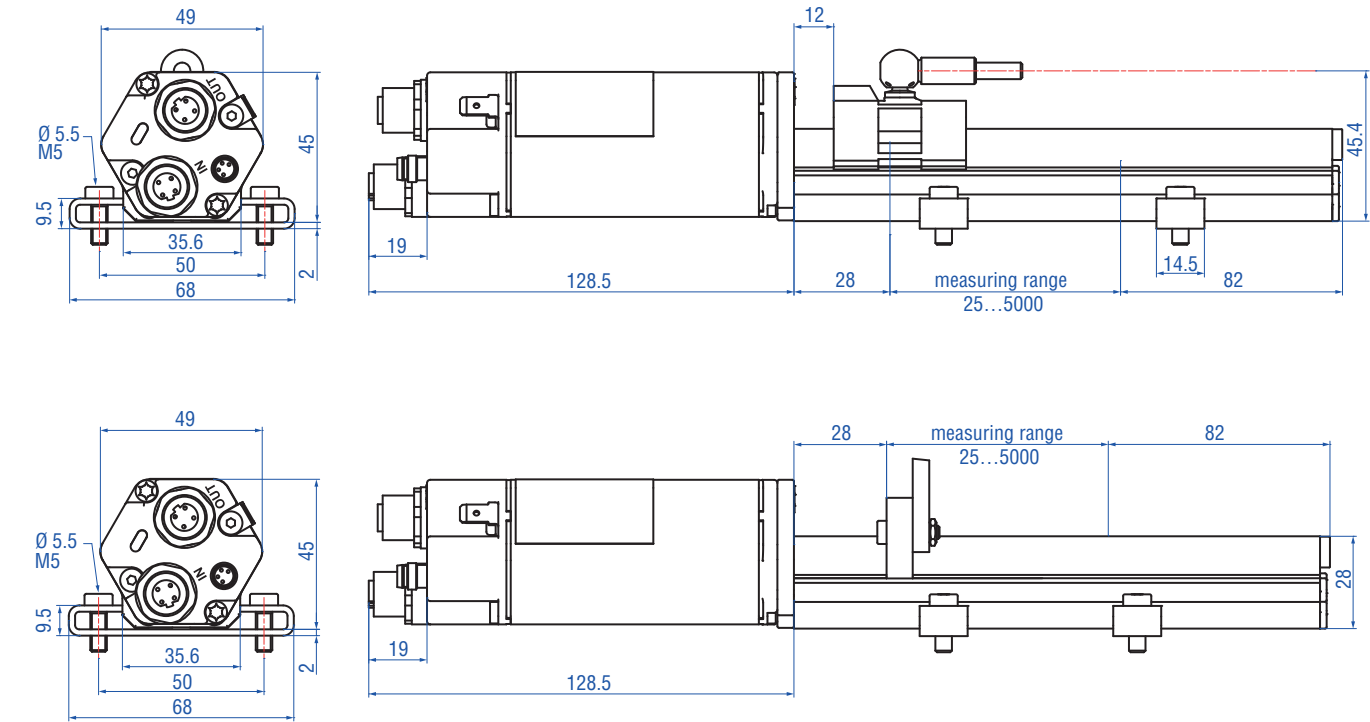


HIGH PRESSURE ROD DESIGN


Temposonics® RH with a pressure resistant stainless steel flange and sensing rod. They are suitable in all hydraulic cylinders suitable for use in hydraulic cylinders and externally in all applications where space is a problem. Position measurement is via ring or U-magnets travelling along the sensing rod without any mechanical contact.


Advantage...
the completely operable sensor cartridge can be replaced for servicing easily without opening the fluid circuit.

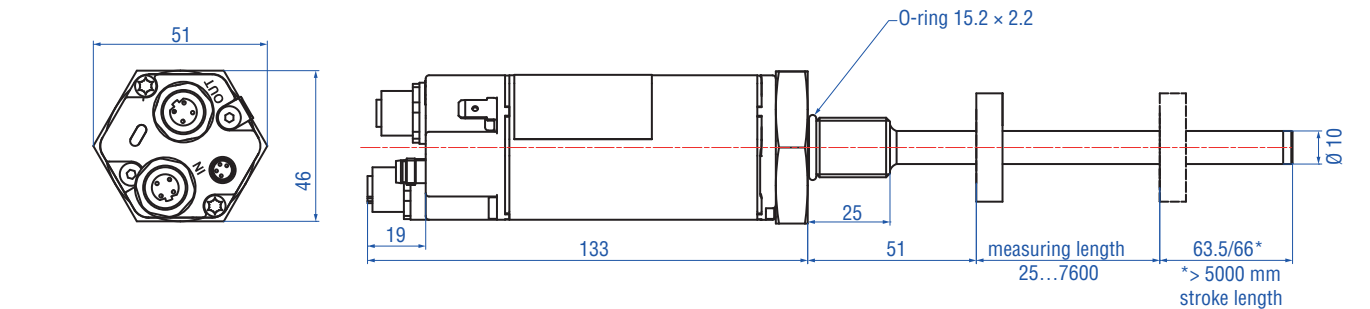

CONNECTOR WIRING (Connector view sensor)

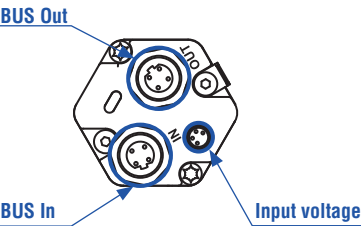


BUS In/Out	Pin	Cable	Function
	1	YE	Tx+
	2	WH	Rx+
	3	OG	Tx-
	4	BU	Rx-

Input voltage	Pin	Cable	Function
	1	BN	+24 VDC (-15/+20 %)
	2	WH	n.c.
	3	BU	DC Ground (0 V)
	4	BK	n.c.


ACCESSORIES

Position magnets for profile model (please order separately)




Magnet slider S
Part no. 252 182

Material: GFK, magnet hard ferrite
Weight: ca. 35 g
Operating temperature: -40...+75 °C



Magnet slider V
Part no. 252 184


Material: GFK, magnet hard ferrite
Weight: ca. 35 g
Operating temperature: -40...+75 °C



U-magnet OD33
Part no. 251 416-2


Material: PA ferrite
Weight: ca. 10 g
Operating temperature: -40...+100 °C
Surface pressure: max. 40 N/mm²
Fastening torque for M4 screws: max. 1 Nm

Position magnets for rod model (please order separately)




Ring magnet OD33
Part no. 201 542-2

Material: PA ferrite GF20
Weight: ca. 14 g
Operating temperature: -40...+100 °C
Surface pressure: max. 40 N/mm²
Fastening torque for M4 screws: max. 1 Nm



Ring magnet OD25,4
Part no. 400 533

Material: PA ferrite
Weight: ca. 10 g
Operating temperature: -40...+100 °C
Surface pressure: max. 40 N/mm²



U-magnet OD33
Part no. 251 416-2

Material: PA ferrite
Weight: ca. 10 g
Operating temperature: -40...+100 °C
Surface pressure: max. 40 N/mm²
Fastening torque for M4 screws: max. 1 Nm

Connection types




**Power cable, female 4 pin (M8)
and cable with pigtail termination**
Part no.: 5 m: 530 066
10 m: 530 096
15 m: 530 093

Wire gage: 4 × 0.25 mm² shielded
Cable jacket: PUR; gray
Max. cable Ø: 8 mm



**Industrial Ethernet cable
(Cat 5e Es) d-coded**
Part no.: 530 064

Connector type: two male, 4 pin (M12)
Cable jacket: PUR cable jacket; green
Operating temperature: -40...+70 °C
Cable length: 5 m



Male, straight, 4 pin
Part no.: 370 523

Housing: zinc nickel plated
Termination: isolation displacement
Wire: AWG24- AWG22
Cable Ø: 5.5...7.2 mm

ORDER CODE

Order code structure: a b c d e f g optional

Table with 2 columns: Code, Description. Rows: a Sensor model, R P Profile, R H Rod.

Table with 2 columns: Code, Description. Rows: b Form factor, Profile Temposonics® RP, S Magnet slider, joint to top, V Magnet slider, joint at front, M U-magnet, OD33, Rod Temposonics® RH, M Flange M18 x 1.5 (Standard), V Flange M18 x 1.5 mit Fluorelastomer housing-seal, D Flange M18 x 1.5 bushing on rod end, R Flange M18 x 1.5 thread M4 at rod end, J Flange M22 x 1.5, rod Ø 12.7 mm, 800 bar, S Flange 3/4" - 16 UNF - 3A.

Table with 2 columns: Code, Description. Rows: c Stroke length, X X X X Profile: 0025...5000 mm / Rod: 0025...7600 mm.

Table with 2 columns: Code, Description. Rows: d Connection type, D 5 6 2 x 4 pin female receptacle M12 D-coded, 4 pin male, M8.

Table with 2 columns: Code, Description. Rows: e Operating voltage, 1 +24 VDC (+20 % / -15 %).

Table with 2 columns: Code, Description. Rows: f Output, U 3 0 1 Powerlink V2.

Optional:

Table with 2 columns: Code, Description. Rows: g Magnet number for multi-position measurement³, 0 2 2 pcs., 0 3 3 pcs., 0 4 4 pcs.

STROKE LENGTH RP

Table with 2 columns: Stroke length, Ordering steps. Rows: 25...500 mm (25 mm), 500...2500 mm (50 mm), 2500...5000 mm (100 mm).

STROKE LENGTH RH

Table with 2 columns: Stroke length, Ordering steps. Rows: 25...500 mm (5 mm), 500...750 mm (10 mm), 750...1000 mm (25 mm), 1000...2500 mm (50 mm), 2500...5000 mm (100 mm), 5000...7600 mm (250 mm).

3/ Note: Please specify magnet numbers for your sensing application and order separately

Document Part Number:
551429 Revision A (EU.EN) 06/2014

LOCATIONS

GERMANY
MTS Sensor Technologie GmbH & Co. KG
Auf dem Schüffel 9
58513 Lüdenscheid, Germany
Tel. + 49 2351 9587-0
Fax + 49 2351 56491
info.de@mtssensors.com
www.mtssensor.de

USA
MTS Systems Corporation Sensors Division
3001 Sheldon Drive
Cary, N.C. 27513, USA
Tel. +1 919 677-0100
Fax +1 919 677-0200
info.us@mtssensors.com
www.mtssensors.com

JAPAN
MTS Sensors Technology Corp.
737 Aihara-machi,
Machida-shi,
Tokyo 194-0211, Japan
Tel. + 81 42 775-3838
Fax + 81 42 775-5512
info.jp@mtssensors.com
www.mtssensor.co.jp

FRANCE
MTS Systems SAS
Zone EUROPARC Bâtiment EXA 16
16/18, rue Eugène Dupuis
94046 Creteil, France
Tel. + 33 1 58 4390-28
Fax + 33 1 58 4390-03
info.fr@mtssensors.com
www.mtssensor.com

ITALY
MTS Systems Srl.Sensor Division
Via Diaz,4
25050 Provaglio d'Iseo (BS), Italy
Tel. + 39 030 988 3819
Fax + 39 030 982 3359
info.it@mtssensors.com
www.mtssensor.com

CHINA
MTS Sensors
Room 504, Huajing Commercial Center,
No. 188, North Qinzhou Road
200233 Shanghai, China
Tel. +86 21 6485 5800
Fax +86 21 6495 6329
info.cn@mtssensors.com
www.mtssensors.cn

LEGAL NOTICES

MTS and Temposonics® are registered trademarks of MTS Systems Corporation. All other trademarks are the property of their respective owners. Printed in Germany. Copyright © 2014 MTS Sensor Technologie GmbH & Co. KG. Alterations reserved. All rights reserved in all media. No license of any intellectual property rights is granted. The information is subject to change without notice and replaces all data sheets previously supplied. The availability of components on the market is subject to considerable fluctuation and to accelerated technical progress. Therefore we reserve the right to alter certain components of our products depending on their availability. In the event that product approbations or other circumstances related to your application do not allow a change in components, a continuous supply with unaltered components must be agreed by specific contract.

ISO 9001
CERTIFIED

